



## Key Features

- IEEE 802.11 a/n compliant
- Up to 300Mbps (5GHz)
- 19dBi Directional high gain antenna
- 24V Proprietary PoE support
- Waterproof Housing IP55 rated
- AP/CB/CR/WDS Mode support
- 4 SSIDs support per radio + VLAN tagged supported
- Web Configuration and EZ controller software
- SNMP V1/ V2c/V3, MIB I/II supported
- WEP/WPA/WPA2 wireless encryption
- IPv4/IPv6 support
- Narrow Bandwidth Support

## N300 5GHz Long Range Point to Point CPE

---

EnGenius Outdoor CPE design High Power, High Sensitivity and Strong Reliability Solutions under Harsh Environment.

EnStation5 engineered with the powerful independent RF interface that offers bandwidth up to 300Mbps on 5GHz band for accommodating heavy traffic services. The high-efficient 19dBi directional with polarization antenna provides an optimal, extended real outdoor throughput performance via point to point transmission.


### Multiple Operation Modes

EnStation5 can operate into four different modes with **Access Point**, **Client Bridge**, **Client Router** and **WDS Mode**. With powerful solution and individual interfaces, EnStation5 can connect with the multiple devices and extend the wireless signal easily.

### Effective Management

EnStation5 integrated with Network Management Software "EZ controller" can offer variety uses in constructing scalable wireless network of all possible application and also allow centralized management via user-interface. EnGenius has developed the multiple functions for maximum security, monitoring and easily management to ensure the optimal users' experience. EnStation5 provides wide-range of authentication and encryption standards (including WEP, WPA, WPA2, TKIP/AES and IEEE 802.1X) to enforce the maximum security.

## Indicator and Physical Interface

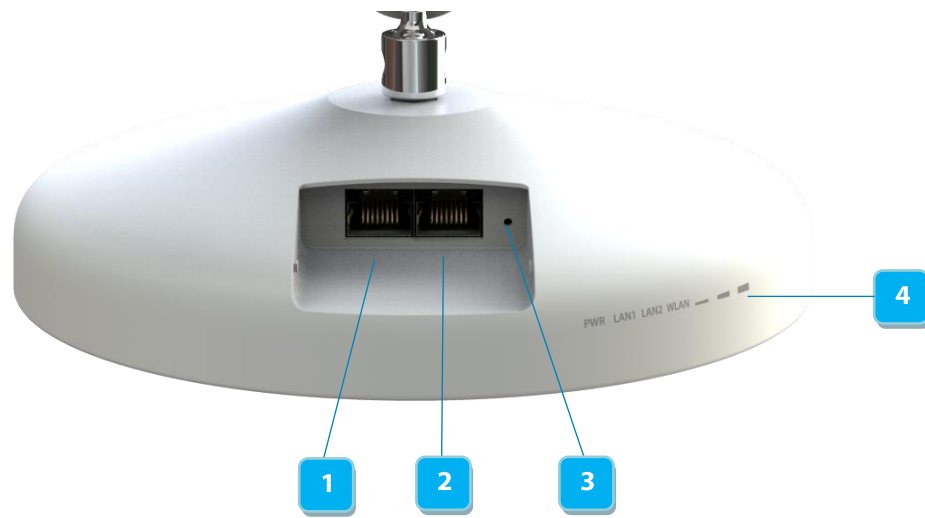

Physical Interface		Indicator	
1	10/100 LAN (PoE)	4	LED Signal
2	10/100 LAN		
3	Reset Button		

# Specification

## Wireless Radio Specification

- 5GHz 802.11a/n
  - Max 300Mbps
- Transmit Power (Maximum Value)
  - Max 26dBm
  - Maximum power is limited by regulatory power
- Supported radio technologies:
  - 802.11a/n: Orthogonal frequency-division multiplexing (OFDM)
  - 802.11n with 5/10/20/40 MHz channel width
  - 802.11a with 5/10/20 MHz channel width
- Supported modulation types:
  - 802.11a/n: BPSK, QPSK, 16-QAM, 64-QAM
- Supported data rates (Mbps):
  - 802.11a: 6, 9, 12, 18, 36, 48, 54
  - 802.11n: 6.5 to 300 (MCS0 to MCS15)

## Power

- Power Source:
  - 24V proprietary compliant source
  - Active Ethernet (Power over Ethernet, PoE)
- Power Consumption:
  - Maximum 7W

## Antennas

- The Directional high gain antenna
  - 19dBi 5GHz antenna
  - Point to point transmission in the long range distance

## Interface

- Two 10/100 BASE-T Ethernet Port
  - One port supports 24V proprietary PoE input
  - One port supports the extension of internet signal
- One reset button

## Mechanical & Environment

- Dimensions / Weight
  - 190mm (D) x 38mm (H)
  - 460g
  - Unit, without mounting kit
- Operating:
  - Temperature: -20°C~60°C
  - Humidity: 0%~90% typical
- Storage:
  - Temperature: -30°C~80°C
- Harsh Environment Use:
  - IP55 rated

## Operation Mode

- Access Point / Client Bridge / Client Router / WDS:
  - A variety of operation modes to serve multiple constituencies and applications.

## Easy to Management

- Auto Channel Selection
  - Setting varies by Regulatory Domains
- SSIDs:
  - BSSID support
  - 4 SSIDs support
- VLAN Tag:
  - Independent VLAN setting can be enable or disable
  - Any packet that enters the Device without a VLAN tag will have a VLAN tag inserted with a PVID (Ethernet Port VID)
- VLAN Pass-through:
  - VLAN pass through over WDS bridge
- SNMP & MIB
  - v1/v2c/v3 support
  - MIB I/II, Private MIB
- Save Configuration as Default:
  - Saves the customized configuration as default value for different customer demands.
- Clients Traffic Status:
  - Reports the various main information timely which is required by administrator
- QoS
  - Complaint with IEEE 802.11e standard
- RADIUS Accounting:
  - Help operators to offload 3G to the wi-fi seamlessly

## Effective Control and Use

- CLI Comments Support
  - Setting varies by Regulatory Domains
- Distance Control (Ack Timeout)
- Multicast Supported
- Wi-fi Scheduler
  - Set the schedule for rebooting the device

## Reinforcement Security

- WEP Encryption-64/128/152 bit
- WPA/WPA2 Enterprise (WPA-EAP using TKIP or AES)
- Hide SSID in beacons
- MAC address filtering
  - Filter up to 50 MACs
- Wireless STA (Client) connection list:
  - Reports the various main information timely which is required by administrator

## RF Specification (Aggregated Value)

Channel	Data Rate	Transmit Power (Aggregated, dBm)	Receive Sensitivity (Aggregated, dBm)
802.11b 2.4 GHz	1 Mbps	-	-
	2 Mbps	-	-
	5.5 Mbps	-	-
	11 Mbps	-	-
802.11g 2.4 GHz	6 Mbps	-	-
	54 Mbps	-	-
802.11a 5 GHz	6 Mbps	26.0	-95.0
	54 Mbps	24.0	-75.0
802.11n HT20 2.4 GHz	MCS 0 / 8 / 16	-	-
	MCS 7 / 15 / 23	-	-
802.11n HT40 2.4 GHz	MCS 0 / 8 / 16	-	-
	MCS 7 / 15 / 23	-	-
802.11n HT20 5GHz	MCS 0 / 8 / 16	26.0	-95.0
	MCS 7 / 15 / 23	21.0	-73.0
802.11n HT40 5GHz	MCS 0 / 8 / 16	26.0	-94.0
	MCS 7 / 15 / 23	21.0	-72.0
802.11ac VHT20 5GHz	MCS0	-	-
	MCS8	-	-
802.11ac VHT40 5GHz	MCS0	-	-
	MCS9	-	-
802.11ac VHT80 5GHz	MCS0	-	-
	MCS9	-	-

\*Maximum performance of the hardware provided. Maximum transmit power is limited by local regulatory.

\*The supported frequency band is restricted by local regulatory requirements.


\*Transmit power is configured in 1.0dBm increments.

## Antenna Specifications (Internal Antenna)


	5GHz (Port1)	5GHz (Port2)
Average Antenna Gain	19dBi	19dBi
Polarization	Linear	Linear
Azimuth Beam-Width	30	18
Elevation Beam-Width	18	30
VSWR	1:2.0	1:2.0
Dimension	175 x 175 x 5.5 (mm)	

## Radiation Diagram


### Port1: E-Plane

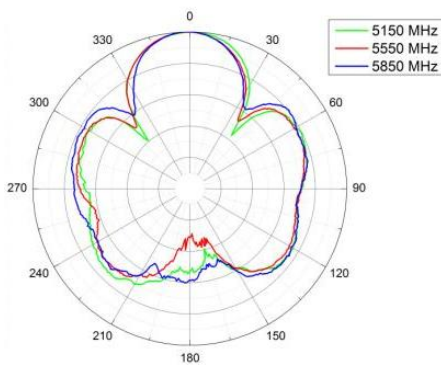


### Port1: H-Plane

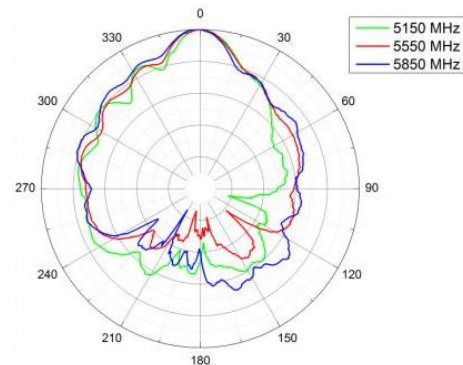

### Port2: E-Plane

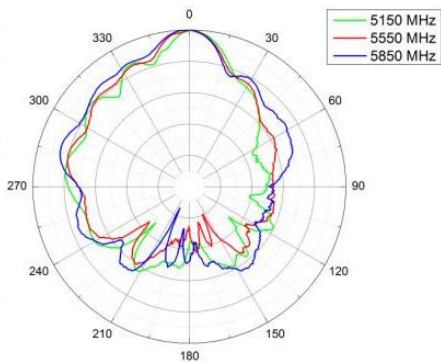


### Port2: H-Plane

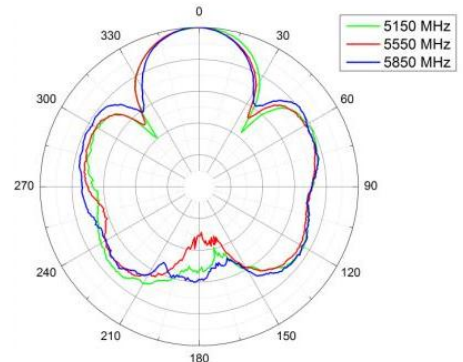

## Network Management System - EnGenius Zone Controller

In enhancing the real-time functionality of a network, applying the best network management software tool is necessary. Built-in Network Management System, EZ Controller (EnGenius Zone Controller), provides an intelligent tool for IT manager, installer, and network administrators to configure control, and manage all wireless devices within network from one central location. This application ensures the entire network will optimally operate without troubles, glitches and interruptions.

The growing demand of performance related results from service providers or someone involved in an enterprise, you need to provide a huge platform to make it successful. The robust design of EZ Controller can manage different devices simultaneously and precisely, as well as configure the advanced service for wireless clients.

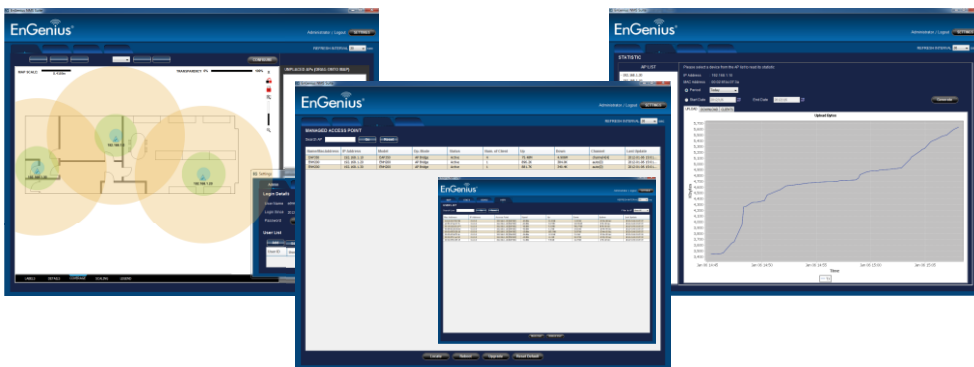

Configure, control and manage EnGenius Enterprise Wireless Devices from one central location.

### Features:

- Easy-to-use User Interface
- Optimize network performance
- Eliminate downtime
- Check real-time wireless coverage
- Monitor and control each sheet
- Monitor traffic loads by AP, MAC or IP address
- Sequential firmware upgrades to deployed APs / Bridges
- Import and archive floorplan maps for radio coverage plotting
- Labels assets by MAC and IP address or user-defined aliases
- Export real-time AP statistics report

### An intelligent solution for different business environment



Villa



Campus



Office



Plaza