

DHI-LCH75-MC410-B-S2

75 inch



Functions

4K HD Display

With up to 3840×2160 resolution, the 4K HD display delivers a clear image in sharp, vivid colors.

Al Recognition of Drawings

Identifies hand-drawn structures such as straight lines, arrowstraight lines, arrow-dotted lines, triangles, parallelograms, trapezoids, rectangles, pentagons, circles, cylinders, pentagrams, semicircles, and ellipse.

Easy to Share

Enhances the experience of sharing files by scanning a code. It automatically determines the network of the device to readily share the QR code across the extranet and the intranet. QR code encryption and extraction are also featured, providing privacy and data security through the required entry of a 6-digit password for verification.

File Management

Supports managing and using Office files, image, video and audio files, and file formats such as PDF and TXT.

Similar to Real Writing Experience

The electronic whiteboard supports pen-point writing. It comes equipped with specialized pressure-sensitive writing pens, designed to enhance the writing experience. With its soft, comfortable nib, writing on the whiteboard feels natural, similar to the real writing experience.

- · Displays in 4K Ultra HD and uses 4K UI.
- With its 2 built-in mid-high frequency speakers, the device supports
 2.0-channel audio output, and its total power is 30 W.
- Microsoft Office and other related software can be installed, and it can play audio and video files in various formats.
- Offers a smooth writing experience through handwriting recognition, pen writing, its fast writing response speed, and pen pressure recognition.
- · Support AI recognition of text and drawings.
- Built-in 8 array microphone and AI 48M camera, produces highquality visuals and audio communication.
- Seamlessly calls the camera and microphone of the whiteboard through its Type-C IN port and screen projector.

Wireless Screen Sharing

In addition to basic file sharing, the device offers wireless screen sharing, interactive operations between two screens, and reverse transmissions. It also supports screen grouping (multiple transmission), host mode (for overall permission control), real-time transmission of images, videos and audios from the wireless camera of the mobile phone to the device, and split-screen mode that displays up to 9 splits on the same screen.

Built-in System Android 14 CPU Quad-core A55 CPU Frequency 1.9 GHz GPU ARM Mali-G52 MP2 (2EE) RAM 8 GB ROM 64 GB NFC No Function Operating System of External Module Windows 7/8/10 Wi-Fi Hotspot Dual-band 2.4 G/5 G; Supports enabling hotspot and Wi-Fi at the same time LCD Panel Screen Size 75 inch Backlight LED Aspect Ratio 16:9 Brightness 350 cd/m² (typ.) Resolution 3840 × 2160 Viewing Angle H: 178°; V: 178° Lifespan ≥50,000 hrs Display Color ≥72% NTSC Refresh Rate 60 Hz Static Contrast Ratio IPS: 1200 (typ.) Response Time ≤8 ms (typ.) Camera Photo: 48 MP; Video: 4MP Auto Control Auto white balance
CPU Quad-core A55 CPU Frequency 1.9 GHz ARM Mali-G52 MP2 (2EE) RAM 8 GB ROM 64 GB NOC Function Operating System of External Module Windows 7/8/10 Dual-band 2.4 G/5 G; Supports enabling hotspot and Wi-Fi at the same time CCD Panel Screen Size 75 inch Backlight LED Aspect Ratio 16:9 Brightness 350 cd/m² (typ.) Resolution 3840 × 2160 Viewing Angle H: 178°; V: 178° Cifespan ≥50,000 hrs Display Color ≥72% NTSC Refresh Rate 60 Hz Response Time ≤8 ms (typ.) Camera Camera Photo: 48 MP; Video: 4MP
CPU Frequency GPU ARM Mali-G52 MP2 (2EE) RAM 8 GB ROM 64 GB NFC No Function Operating System of External Module Wi-Fi Hotspot Ui-Fi Hotspot CCPU Panel Screen Size 75 inch Backlight LED Aspect Ratio 16:9 Brightness 350 cd/m² (typ.) Resolution 3840 × 2160 Viewing Angle H: 178°; V: 178° Lifespan ≥50,000 hrs Display Color ≥72% NTSC Refresh Rate 60 Hz Static Contrast Ratio IPS: 1200 (typ.) Response Time ≤8 ms (typ.) Camera Camera Photo: 48 MP; Video: 4MP
ARM Mali-G52 MP2 (2EE) RAM 8 GB ROM 64 GB NFC No Function Operating System of External Module Wi-Fi Hotspot LCD Panel Screen Size 75 inch Backlight LED Aspect Ratio 16:9 Brightness 350 cd/m² (typ.) Resolution 3840 × 2160 Viewing Angle H: 178°; V: 178° Lifespan ≥50, 000 hrs Display Color ≥72% NTSC Refresh Rate 60 Hz Static Contrast Ratio IPS: 1200 (typ.) Response Time ≤8 ms (typ.) Camera Camera Photo: 48 MP; Video: 4MP
RAM 8 GB ROM 64 GB NFC No Function Operating System of External Module Wi-Fi Hotspot Dual-band 2.4 G/5 G; Supports enabling hotspot and Wi-Fi at the same time LCD Panel Screen Size 75 inch Backlight LED Aspect Ratio 16:9 Brightness 350 cd/m² (typ.) Resolution 3840 × 2160 Viewing Angle H: 178°; V: 178° Lifespan 250, 000 hrs Display Color 272% NTSC Refresh Rate 60 Hz Static Contrast Ratio IPS: 1200 (typ.) Response Time 28 ms (typ.) Camera Chamera Photo: 48 MP; Video: 4MP
ROM 64 GB NFC No Function Operating System of External Module Wi-Fi Hotspot Wi-Fi Hotspot LCD Panel Screen Size 75 inch Backlight LED Aspect Ratio 16:9 Brightness 350 cd/m² (typ.) Resolution Viewing Angle H: 178°; V: 178° Lifespan Display Color \$75 inch \$7
Function Operating System of External Module Wi-Fi Hotspot Wi-Fi at the same time LCD Panel Screen Size 75 inch Backlight LED Aspect Ratio Brightness 350 cd/m² (typ.) Resolution Viewing Angle Lifespan 250, 000 hrs Display Color 272% NTSC Refresh Rate 60 Hz Static Contrast Ratio LED Static Contrast Ratio Photo: 48 MP; Video: 4MP
Function Operating System of External Module Wi-Fi Hotspot Dual-band 2.4 G/5 G; Supports enabling hotspot and Wi-Fi at the same time LCD Panel Screen Size 75 inch Backlight LED Aspect Ratio 16:9 Brightness 350 cd/m² (typ.) Resolution 3840 × 2160 Viewing Angle H: 178°; V: 178° Lifespan ≥50, 000 hrs Display Color ≥72% NTSC Refresh Rate 60 Hz Static Contrast Ratio IPS: 1200 (typ.) Response Time ≤8 ms (typ.) Camera Photo: 48 MP; Video: 4MP
Operating System of External Module Wi-Fi Hotspot Dual-band 2.4 G/5 G; Supports enabling hotspot and Wi-Fi at the same time LCD Panel Screen Size 75 inch Backlight LED Aspect Ratio 16:9 Brightness 350 cd/m² (typ.) Resolution 3840 × 2160 Viewing Angle H: 178°; V: 178° Lifespan ≥50, 000 hrs Display Color ≥72% NTSC Refresh Rate 60 Hz Static Contrast Ratio IPS: 1200 (typ.) Response Time ≤8 ms (typ.) Camera Photo: 48 MP; Video: 4MP
External Module Wi-Fi Hotspot Dual-band 2.4 G/5 G; Supports enabling hotspot and Wi-Fi at the same time LCD Panel Screen Size 75 inch Backlight LED Aspect Ratio 16:9 Brightness 350 cd/m² (typ.) Resolution 3840 × 2160 Viewing Angle H: 178°; V: 178° Lifespan ≥50, 000 hrs Display Color \$72% NTSC Refresh Rate 60 Hz Static Contrast Ratio IPS: 1200 (typ.) Response Time \$8 ms (typ.) Camera Photo: 48 MP; Video: 4MP
Wi-Fi HotspotDual-band 2.4 G/5 G; Supports enabling hotspot and Wi-Fi at the same timeLCD PanelScreen Size75 inchBacklightLEDAspect Ratio16:9Brightness350 cd/m² (typ.)Resolution3840 × 2160Viewing AngleH: 178°; V: 178°Lifespan≥50, 000 hrsDisplay Color≥72% NTSCRefresh Rate60 HzStatic Contrast RatioIPS: 1200 (typ.)Response Time≤8 ms (typ.)CameraPhoto: 48 MP; Video: 4MP
Wi-Fi at the same time LCD Panel Screen Size 75 inch Backlight LED Aspect Ratio 16:9 Brightness 350 cd/m² (typ.) Resolution 3840 × 2160 Viewing Angle H: 178°; V: 178° Lifespan ≥50, 000 hrs Display Color ≥72% NTSC Refresh Rate 60 Hz Static Contrast Ratio IPS: 1200 (typ.) Response Time ≤8 ms (typ.) Camera Camera Photo: 48 MP; Video: 4MP
Screen Size 75 inch Backlight LED Aspect Ratio 16:9 The prightness 350 cd/m² (typ.) Resolution 3840 × 2160 The prightness Aspect Ratio 16:9 The prightness 350 cd/m² (typ.) Resolution 3840 × 2160 The prightness The prigh
Screen Size 75 inch Backlight LED Aspect Ratio 16:9 Brightness 350 cd/m² (typ.) Resolution 3840 × 2160 Viewing Angle H: 178°; V: 178° Lifespan ≥50,000 hrs Display Color ≥72% NTSC Refresh Rate 60 Hz Static Contrast Ratio IPS: 1200 (typ.) Response Time ≤8 ms (typ.) Camera Photo: 48 MP; Video: 4MP Microphone Type-C Port Touchscree Response Time Touch Seponse Time Valid Touch Writing Mode Anti-light Interf Surface Hardne Touch Resolution Number of Mul Writing Points
Backlight LED Aspect Ratio 16:9 Touchscreen Response Time Response Time Touch Technology Touch Points Valid Touch Points Valid Touch Viewing Angle Anti-light Interference Static Contrast Ratio IPS: 1200 (typ.) Response Time Sarface Hardness Touch Points Valid Touch Writing Mode Anti-light Interference Surface Hardness Touch Resolution Number of Multi-user Writing Points
Aspect Ratio 16:9 Brightness 350 cd/m² (typ.) Resolution 3840 × 2160 Viewing Angle H: 178°; V: 178° Lifespan ≥50,000 hrs Display Color ≥72% NTSC Refresh Rate 60 Hz Static Contrast Ratio IPS: 1200 (typ.) Response Time 48 ms (typ.) Camera Photo: 48 MP; Video: 4MP Touch Technology Touch Points Valid Touch Writing Mode Anti-light Interference Surface Hardness Touch Resolution Number of Multi-user Writing Points
Brightness 350 cd/m² (typ.) Response Time Resolution 3840 × 2160 Touch Technology Viewing Angle H: 178°; V: 178° Touch Points Lifespan ≥50, 000 hrs Valid Touch Display Color ≥72% NTSC Writing Mode Refresh Rate 60 Hz Anti-light Interference Static Contrast Ratio IPS: 1200 (typ.) Surface Hardness Response Time ≤8 ms (typ.) Touch Resolution Camera Photo: 48 MP; Video: 4MP Writing Points
Resolution 3840 × 2160 Touch Technology Viewing Angle H: 178°; V: 178° Touch Points Lifespan ≥50,000 hrs Valid Touch Display Color ≥72% NTSC Writing Mode Refresh Rate 60 Hz Anti-light Interference Static Contrast Ratio IPS: 1200 (typ.) Surface Hardness Response Time ≤8 ms (typ.) Touch Resolution Camera Photo: 48 MP; Video: 4MP Writing Points
Viewing Angle H: 178°; V: 178° Touch Points Lifespan ≥50, 000 hrs Valid Touch Display Color ≥72% NTSC Writing Mode Refresh Rate 60 Hz Anti-light Interference Static Contrast Ratio IPS: 1200 (typ.) Surface Hardness Response Time ≤8 ms (typ.) Touch Resolution Camera Photo: 48 MP; Video: 4MP Writing Points
Lifespan ≥50,000 hrs Display Color ≥72% NTSC Refresh Rate 60 Hz Static Contrast Ratio IPS: 1200 (typ.) Response Time ≤8 ms (typ.) Camera Photo: 48 MP; Video: 4MP Valid Touch Writing Mode Anti-light Interference Surface Hardness Touch Resolution Number of Multi-user Writing Points
Display Color Refresh Rate 60 Hz Static Contrast Ratio PPS: 1200 (typ.) Response Time ≤8 ms (typ.) Camera Photo: 48 MP; Video: 4MP Writing Mode Anti-light Interference Surface Hardness Touch Resolution Number of Multi-user Writing Points
Refresh Rate 60 Hz Static Contrast Ratio IPS: 1200 (typ.) Response Time ≤8 ms (typ.) Camera Camera Photo: 48 MP; Video: 4MP Anti-light Interference Surface Hardness Touch Resolution Number of Multi-user Writing Points
Static Contrast Ratio IPS: 1200 (typ.) Response Time \$8 ms (typ.) Camera Camera Photo: 48 MP; Video: 4MP Surface Hardness Touch Resolution Number of Multi-user Writing Points
Response Time \$4 ms (typ.) Camera Photo: 48 MP; Video: 4MP Touch Resolution Number of Multi-user Writing Points
Camera Photo: 48 MP; Video: 4MP Writing Points
Camera Photo: 48 MP; Video: 4MP Writing Points
Auto Control Auto white balance Space
Speaker
Distortion ≤5% Number of Cavities
Max. Resolution 2560 × 1440@30 fps Frequency
Field of View D: 88°, H: 79°, V: 51 Power
Face Detection No Built-in Speaker
Device Ports Microphone
Light Sensor 1 Pick-up Distance
Front Button $1 \times$ power button Number of Microphones
Front Ports 1 × USB 2.0 AGC
Network Port 1 × RJ-45 Echo Cancellation
Wi-Fi Yes, 1 × Station, 1 × AP Polar Pattern
Wi-Fi Standard Station: 802.11b/g/n/a/ac/ax Intelligent Noise Filtering AP: 802.11b/g/n/a/ac/ax

General	
Power Supply	100–240 VAC, 50/60 Hz
Power Consumption	141.5W (basic), 270 W (max)
Operating Temperature	0 °C to +40 °C (+32 °F to +104 °F)
Storage Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Operating Humidity	10%–90% (RH), non-condensing
Storage Humidity	10%–90% (RH), non-condensing
Product Material	Metal casing
Protective Glass	3.2 mm Anti-dazzle tempered glass
Casing Color (Frame/Rear)	The left and right sides are black, and the top and bottom are starry gray
Product Dimensions	1,707.6 mm × 115.7 mm × 1,038.5 mm (67.2" × 4.6" × 40.9") (L × W × H)
Frame Size	Top border: 35.3 mm (1.4"), left and right borders: 17.5 mm (0.69"), bottom border: 40 mm (1.6")
Packaging Dimensions	1,875 mm × 227 mm × 1,177 mm (73.82" × 8.94" × 46.34") (L × W × H)
Net Weight	50 kg (110.2 lb)
Gross Weight	58.4 kg (128.8 lb)
Holes Distance	600 mm × 400 mm (23.62" × 15.75")
Installation	Wall mount; mobile bracket
Standby Power Consumption	≤0.5 W
Packing List	1 × Smart interactive whiteboard 1 × Wireless plug-in module 1 × Power cord 2 × Stylus pen 1 × Quick start guide 1 × Legal and regulatory information 1 × Wall mount bracket 1 × Accessory package 1 × Remote control

Ordering Information				
Type	Model	Description		
Smart interactive whiteboard	DHI-LCH75-MC410-B-S2	75 inch		
Accessories (Optional)	DHI-PKP-UC10A	USB Camera		
	DHI-PKC-MS0C	DHI-PKC-MS0C		
	DHI-SP-PI5C75IS	Open Pluggable Specification		
	DHI-PKC-WM1A	Omnidirectional Digital Microphone		
	DHI-PKP-IP1A	Smart Pen		
	DHI-SP-PI5C82IS	Open Pluggable Specification		
	DHI-PKC-MS0A	DHI-PKC-MS0A		
	DHI-PKP-WP1B	Wireless transmitter		

Type	Model	Description
	DHI-SP-PI7C82IS	Open Pluggable Specification
	DHI-SP-PI7C75IS	Open Pluggable Specification
	DHI-SP-PI5C72IS	Open Pluggable Specification
	DHI-PKC-MS1A	DHI-PKC-MS1A

Accessories

Optional:



DHI-PKC-MS0A DHI-PKC-MS0A



DHI-PKC-MS0C DHI-PKC-MS0C



DHI-PKC-MS1A DHI-PKC-MS1A



DHI-PKC-WM1A Omnidirectional Digital Microphone



DHI-PKP-IP1A Smart Pen



DHI-PKP-UC10A USB Camera



DHI-PKP-WP1B Wireless transmitter



DHI-SP-PI5C72IS Open Pluggable Specification



DHI-SP-PI5C75IS Open Pluggable Specification




DHI-SP-PI5C82IS Open Pluggable Specification




DHI-SP-PI7C75IS Open Pluggable Specification



DHI-SP-PI7C82IS Open Pluggable Specification

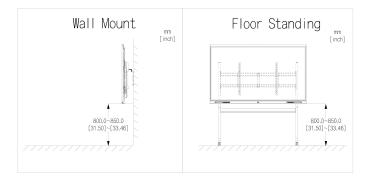

Dimensions (mm[inch])

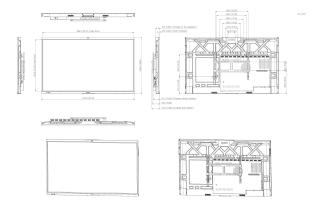

Panels

